
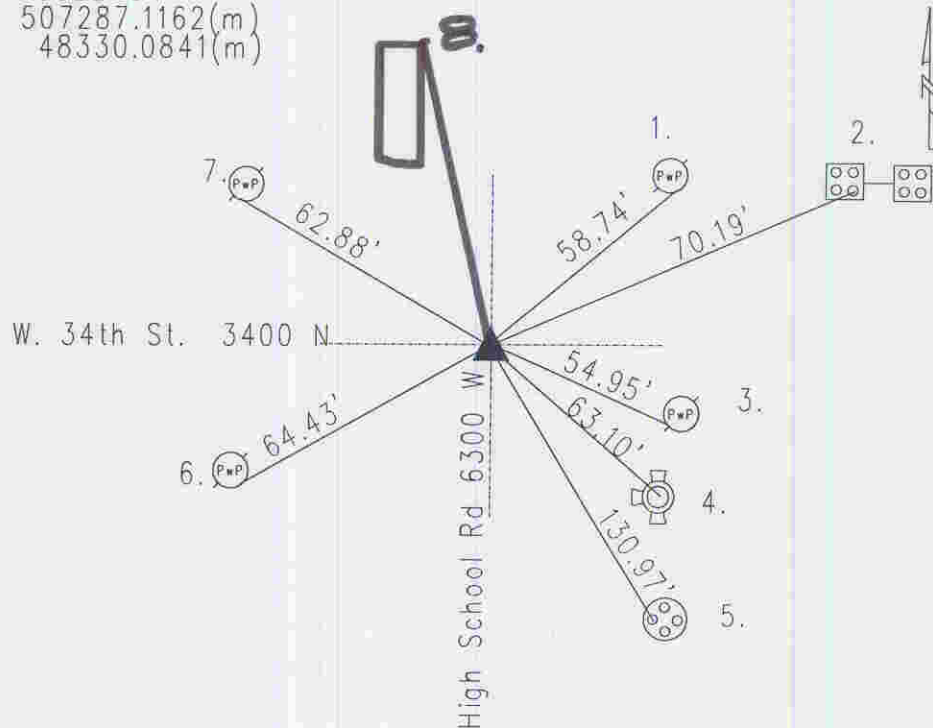


OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER
SECTION 24 TOWNSHIP 16 RANGE 2
DATE: -6-8-2000-- 9-20-05
PARTY CHIEF: Kiste
CREW: _____
TYPE OF MARKER: Harrison
METHOD OF ESTABLISHMENT: County: 10-2-89

IN. S.P.C. E ZONE, NAD 83
NAME: 16022404
N: 507287.1162(m)
E: 48330.0841(m)

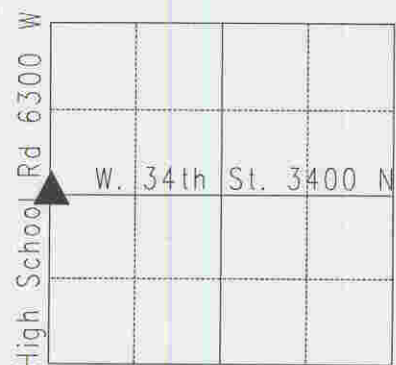

Original post set 1820 by Wm. B. Laughlin with witnesses: 6" ash N 7 E 14 links, 3" beech S 43 E 4 links per Marion County Atlas pg. 3. Survey by Percy Hosbrook 10-30-1850 indicates a dressed rock with witness: 12" oak N 59 E 128 links, 24" elm S 36 W 46 links per Wayne Township Legal Survey Book pg. 11. Monroe 10-4-53 called a bolt. Monroe 10-29-56 called a bolt. Monroe 7-31-59 called a pipe. Schmidt 10-4-61 called a pipe. McLand 7-23-69 called an iron pin. SeFranka 9-7-71 called an iron pin. Wilcoxen 4-15-76 called a PK nail. Greene 10-2-89 called a PK nail. Excavated by Kiste 6-8-00 and railroad spike was found 4" down. No stone or other monuments were found. Harrison set.

HC 622404

REF.	DISTANCE	DESCRIPTION
1.	58.74'	Mag nail w/washer SE PwP#298-394 B 10"up
2.	70.19'	Cut 'x' SE-bolt of "Clark" sign base
3.	54.95'	Mag nail w/washer SW PwP#262-424 A 12"up
4.	63.10'	Top nut of fire hydrant
5.	130.97'	Cut 'x' W most bolt light pole base
6.	64.43'	Mag nail w/washer SE PwP#128-423 A 10"up
7.	62.88'	Mag nail w/washer SW PwP#3393 B 8"up
8.	74.01'	NE corner concrete traffic box base